



PRODUCT  
CATELOGE



The Audio Point Product offer the Highest level of performance and Trouble free experience. Our engineers have optimized each Products to ensure each product Operates to its fullest potential for longer time.

*Thankyou for purchasing this genuine Audio Point Product.*



*Thank you*  
FOR YOUR PURCHASE



## MODEL : MD8F301

Nominal Diameter	203mm/8"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (AES)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	102.0 dB
Frequency Range	80-4000 Hz
Suspension	Single
Cone material	Paper

8"



## MODEL : TH-150A

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	38.5mm/1.5"
Power Rating	150 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-15000 Hz
Suspension	Single
Cone material	Paper

12"



10"



## MODEL : 10MD400

Nominal Diameter	250mm/10"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (AES)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	102.0 dB
Frequency Range	80-4000 Hz
Suspension	Single
Cone material	Paper

12"



## MODEL : CS-12AX-200

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	51.2mm/2"
Power Rating	200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

## MODEL : TS-NEO12500

Nominal Diameter	320mm/12"
Magnet Type	Neodymium
Voice Coil Dia.	75.5mm/3"
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98.5 dB
Frequency Range	40-3500 Hz
Suspension	Single
Cone material	Paper

12"



Neodymium

## MODEL : P12-MB200

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	51.2mm/2"
Power Rating	200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

12"





## MODEL : 12MB-250

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	51.2mm/2"
Power Rating	250 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

12"



## MODEL : 12NC-400H3

Nominal Diameter	320mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98 dB
Frequency Range	55-4000 Hz
Suspension	Single
Cone material	Paper

12"



12"



## MODEL : 12MB-300AL

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	62.5mm/2.5"
Power Rating	300 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-3000 Hz
Suspension	Single
Cone material	Paper

12"



## MODEL : MB-400HF

Nominal Diameter	320mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	99 dB
Frequency Range	55-4000 Hz
Suspension	Single
Cone material	Paper

## MODEL : MB-300CS

Nominal Diameter	320mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	300 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-2500 Hz
Suspension	Single
Cone material	Paper

12"



## MODEL : PD82-A500

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	82.5mm/3.25"
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98 dB
Frequency Range	50-3000 Hz
Suspension	Single
Cone material	Paper

12"





## MODEL : 15-GR-400

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : FL-40015

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"



15"



## MODEL : BH-15WY-500

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (AES)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-2000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : MB-400Y

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

## MODEL : BL-40015

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : MB-15G1-500

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"





## MODEL : 12BW-600B

Nominal Diameter	305mm/12"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98 dB
Frequency Range	45-4000 Hz
Suspension	Single
Cone material	Paper

12"



## MODEL : GT-15400MB

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3000 Hz
Suspension	Single
Cone material	Paper

15"



15"



Neodymium

## MODEL : TS-NEO15400

Nominal Diameter	381mm/15"
Magnet Type	Neodymium
Voice Coil Dia.	75.5mm/3" I/O
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3500 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : DZIRE-400MB

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3" I/O
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

## MODEL : MB-15G-300

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	300 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : TS-15X400

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3"
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"





## MODEL : MB-400SV

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3" I/O
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-2000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : GT-500MB

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	82.5mm/3.25" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

15"



15"



Premium

## MODEL : V15BN550

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	76.2mm/3" I/O
Power Rating	400 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	99.5 dB
Frequency Range	40-3000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : TAJ-15501Z

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	82.5mm/3.25" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

## MODEL : TS-15NX500

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	82.5mm/3.25" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : 15-SD-500

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	82.5mm/3.25" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

15"





## MODEL : BW-500X

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	76.2mm/3" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98 dB
Frequency Range	45-3500 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : 2226B-V3

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Single
Cone material	Paper

15"



15"



## MODEL : SONET-500GM15

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	82.5mm/3.25" I/O
Power Rating	500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	98 dB
Frequency Range	49-3000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : 15-TBW-650G

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Single
Cone material	Paper

## MODEL : 2226-CS

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2000 Hz
Suspension	Single
Cone material	Paper

15"



## MODEL : GM-650Z

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2000 Hz
Suspension	Single
Cone material	Paper

15"





## MODEL : V15PA650

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	650 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Single
Cone material	Paper

15"



Premium

15"



## MODEL : STM-15800

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	35-2500 Hz
Suspension	Single
Cone material	Paper

## MODEL : YP-850

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	35-2500 Hz
Suspension	Double
Cone material	Paper

15"



## MODEL : TS-15X800

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Single
Cone material	Paper

15"



15"



## MODEL : F15-1000LB

Nominal Diameter	381mm/15"
Magnet Type	ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	35-2500 Hz
Suspension	Single
Cone material	Paper

## MODEL : TS-15NX800

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Double
Cone material	Paper

15"





## MODEL : PD-C15850EL

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	850 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	55-2500 Hz
Suspension	Single
Cone material	Paper

15"



Premium

## MODEL : PD15-1000B

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	40-1500 Hz
Suspension	Dual Silicon
Cone material	Paper

15"



15"



## MODEL : TS-15X1000

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	1000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	49-2500 Hz
Suspension	Double
Cone material	Paper

15"



## MODEL : PD15-1200A

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

## MODEL : CR-1000A

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4"
Power Rating	1000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	55-2000 Hz
Suspension	Double
Cone material	Paper

15"



## MODEL : 15SW-1600

Nominal Diameter	381mm/15"
Magnet Type	Ferrite
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1600 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicon
Cone material	Paper

15"





## MODEL : F18-1200LB

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

18"



## MODEL : TS-18NX1200

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Single
Cone material	Paper

18"



18"



## MODEL : XB-1000-B1

Nominal Diameter	457mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Single
Cone material	Paper

18"



## MODEL : LPR-1200

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1500 Hz
Suspension	Double
Cone material	Paper

## MODEL : 18P-WF-1200

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	99.3mm/4" I/O
Power Rating	1200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1500 Hz
Suspension	Double
Cone material	Paper

18"



## MODEL : LPR-1500NC

Nominal Diameter	457mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1000 Hz
Suspension	Double Silicone
Cone material	Paper

18"





## MODEL : CF-1600LF

Nominal Diameter	457mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1600 W (AES)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Double Silicone
Cone material	Paper

18"



## MODEL : TS-18NX2000

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

18"



18"



## MODEL : AP-1600LF

Nominal Diameter	457mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1600 W (AES)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	35-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

18"



## MODEL : 18L-1800BT

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1500 Hz
Suspension	Double Silicone
Cone material	Paper

## MODEL : BW-1800LFDM

Nominal Diameter	457mm/18"
Magnet Type	Ferrite 2 Magnet
Voice Coil Dia.	114.4mm/4.5" I/O
Power Rating	1800 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Single+Double Silicone
Cone material	Paper

18"



## MODEL : PD18-2000

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	99 dB
Frequency Range	30-1500 Hz
Suspension	Double
Cone material	Paper

18"





## MODEL : TS-18X2000ES

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1500 Hz
Suspension	Double Silicone
Cone material	Paper

18"



## MODEL : PD1890A-DM

Nominal Diameter	487mm/18"
Magnet Type	Ferrite 2 Magnet
Voice Coil Dia.	126mm/5" I/O
Power Rating	2200 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	95 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

18"



18"



## MODEL : 18L-2000-Y

Nominal Diameter	487mm/18"
Magnet Type	Ferrite (4 cut)
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1500 Hz
Suspension	Double Silicone
Cone material	Paper

18"



## MODEL : PD-2500PT

Nominal Diameter	487mm/18"
Magnet Type	Ferrite (4 cut)
Voice Coil Dia.	152mm/6" I/O
Power Rating	2500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1000 Hz
Suspension	Double Spider

## MODEL : PD1850LF

Nominal Diameter	487mm/18"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	96 dB
Frequency Range	30-1500 Hz
Suspension	Dual Silicone
Cone material	Paper

18"



## MODEL : 21SW-2000

Nominal Diameter	530mm/21"
Magnet Type	Ferrite
Voice Coil Dia.	126mm/5" I/O
Power Rating	2000 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1000 Hz
Suspension	Double Spider
Cone material	Paper

21"





## MODEL : 21SW-2500

Nominal Diameter	530mm/21"
Magnet Type	Ferrite (4 cut)
Voice Coil Dia.	152mm/6" I/O
Power Rating	2500 W (RMS)
Nominal Impedance	8 Ohms
Surround material	Cloth
Sensitivity	97 dB
Frequency Range	30-1000 Hz
Suspension	Double Spider

21"



## MODEL : MAX-5050

Power Output	: 2Ω 2250 X 2 4Ω 1300 X 2 8Ω 950 X 2
Bridge Power Output	: 3500 W (Apx.)
Damping Factor	: >500
Channel Output	: 950 Watt 650 Watt 400 Watt
Power Supply	: AC : 230/260V

## MODEL : DJX-4500

Power Output	: 2Ω 2200 X 2 4Ω 1250 X 2 8Ω 800 X 2
Bridge Power Output	: 3000 W (Apx.)
Damping Factor	: >500
Channel Output	: 800 Watt 600 Watt 300 Watt
Power Supply	: AC : 230/260V



## MODEL : DJ-4000

Power Output	: 2Ω 2000 X 2 4Ω 1200 X 2 8Ω 800 X 2
Bridge Power Output	: 2500 W (Apx.)
Damping Factor	: >500
Channel Output	: 750 Watt 550 Watt 250 Watt
Power Supply	: AC : 230/260V



## MODEL : DJ-2500

Power Output	: 2Ω 2000 X 2 4Ω 1600 X 2
Bridge Power Output	: 2000 W (Apx.)
Damping Factor	: >500
Channel Output	: 700 Watt 450 Watt
Power Supply	: AC : 220/240V

## MODEL : PBT-501

Watts (RMS)	: 450 Watt
Watts (PGM)	: 600
Output Channel	: 450 Watt
Power Supply	: AC : 220/240V





## MODEL : SSA-250DP

Watts (RMS) : 250 Watt  
Watts (PGM) : 300  
Output Channel : 250 Watt  
Power Supply : AC : 220/240V



## DJ COLUMN



## DJ COLUMN



## DJ COLUMN



## DJ COLUMN



## MODEL : D750


Exit Thorat 2 inch  
Mounting Type Bolt on  
Nominal Impedance 8 Ohms  
Max Power 220 Watts  
RMS Power 110 Watts  
Sensitivity @ 1W/1m 108 dB  
Usable Frequency Range 0.6-16 kHz  
Recommended Crossover 1.5 kHz or Higher  
12 dB/oct. min

Voice Coil Diameter 3 inch  
Voice Coil Material CCAW  
Voice Coil Former Kapton  
Flux Density 1.8 T.  
Magnet Type Strontium Ferrite  
Diaphragm Material Titanium

**HF**



**HF**

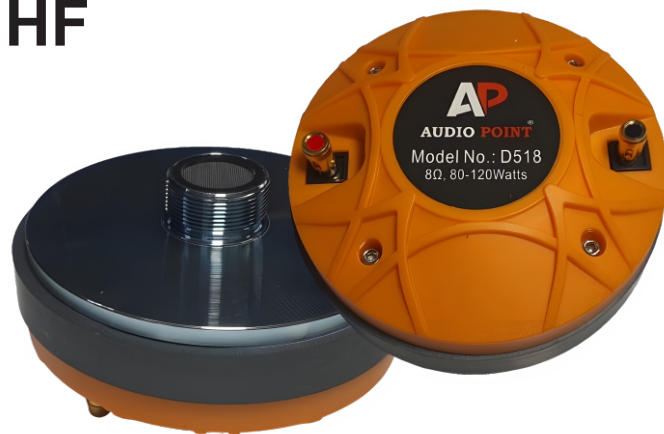

## MODEL : D518

Exit Thorat 1 inch  
Mounting Type Screw on 1-3/8 inch  
Nominal Impedance 8 Ohms  
Max Power 120 Watts  
RMS Power 80 Watts  
Sensitivity @ 1W/1m 108 dB  
Usable Frequency Range 0.9-20kHz  
Recommended Crossover 2.2 kHz or Higher  
12 dB/oct. min

Voice Coil Diameter 2 inch  
Voice Coil Material CCAW  
Magnet Type Strontium Ferrite  
Diaphragm Material Titanium

## MODEL : D450

Exit Thorat 1 inch  
Mounting Type Screw on 1-3/8 inch  
Nominal Impedance 8 Ohms  
Max Power 100 Watts  
RMS Power 60 Watts  
Sensitivity @ 1W/1m 110 dB  
Usable Frequency Range 1.0-20 kHz  
Recommended Crossover 2.2 kHz or Higher  
12 dB/oct. min

Voice Coil Diameter 1.75 inch  
Voice Coil Material CCAW  
Magnet Type Strontium Ferrite  
Diaphragm Material Titanium


**HF**




## NETWORK PLATE



**750**

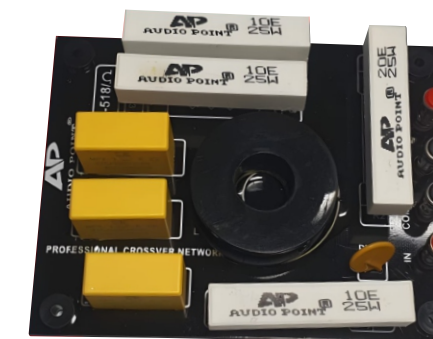

**518**




**450**

## VOICE COIL



**126MM  
2000 WATT**

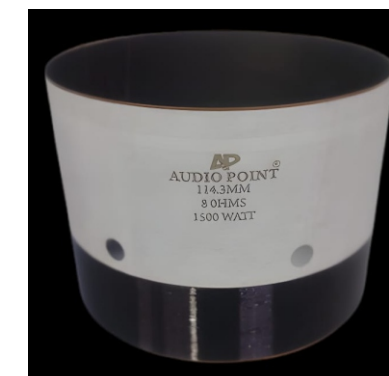

**114.3MM  
1500 WATT**



**82.5MM  
500 WATT**



**99.3MM  
1200 WATT**



**99.3MM  
1000 WATT**



**99.3MM  
600 WATT**




**76.2MM  
400 WATT**



## INDEX

- ➔ **LF DRIVERS**
- ➔ **NEODYMIUM DRIVERS**
- ➔ **AMPLIFIERS**
- ➔ **DJ COLUMNS**
- ➔ **HF DRIVERS**
- ➔ **NETWORK PLATE**
- ➔ **VOICE COIL**

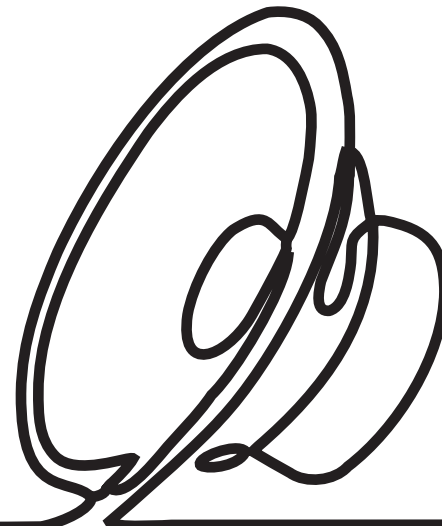

The Audio Point Product offer the Highest level of performance and Trouble free experience. Our engineers have optimized each products to ensure each product operates to its fullest potential for longer time.

*Thankyou for purchasing this genuine  
Audio Point Product.*

## ABOUT US

With an experience of four decades in Electronic Industry, Audio Point Speakers are into manufacturing of wide range of Speakers (Woofers, Speakers and Tweeters)

Apart from Speakers, Audio Point is also into manufacturing of Amplifiers, Voice Coil, HF Drivers, DJ Cabinets.

With our advanced Technology and dedicated R&D Team, we cater to all parts of India. Apart from our standard products, we do customization as per customer requirements.

Backed by Professional Team, Trained Staff, Effective R&D Team and Forceful Quality Management, we are dedicated towards excellence.

We are committed to quality and maintaining standardization on all our products, our products pass through various prescribed tests during production.

Audio Point Speakers Primary line consists of high frequency drivers and Cone drivers. We have made a Strong commitment to provide a well balanced line of low frequencies drivers that Range 8" to 21" as well as a very complete line of High frequency drivers.

